




360° DVR - No Blinds Spots, 360° Recording

Model : DMC-4718

DVR + Monitor + Four 180° Cameras


Cb`mic&(-)

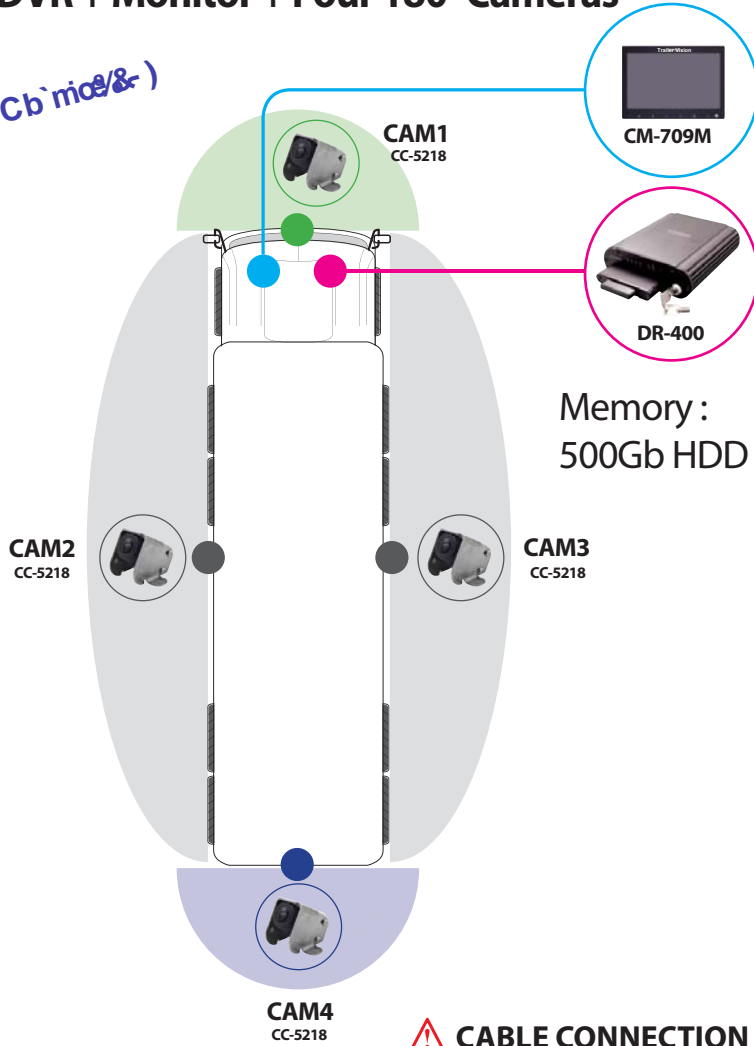


CABLE CONNECTION

* Includes 18m, 9m, 5m & 5m cables.
Additional/trailer cables also available.

Camera Views:

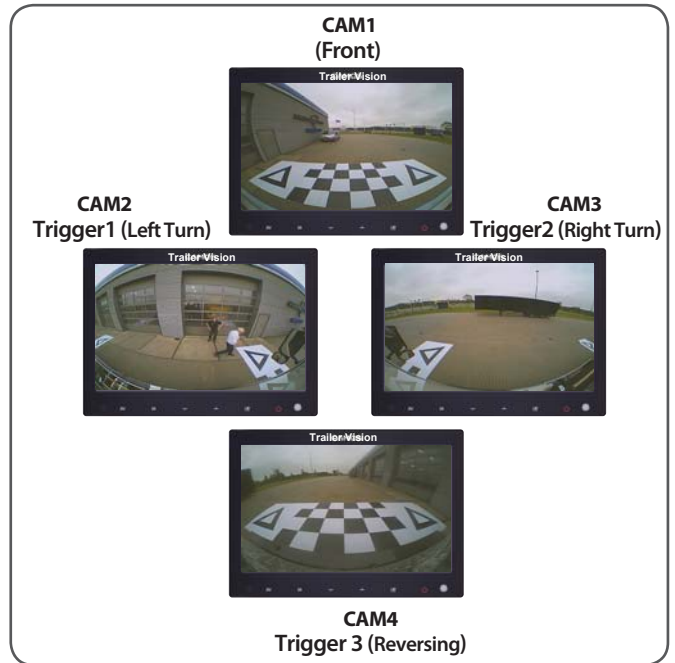

Back of DVR:

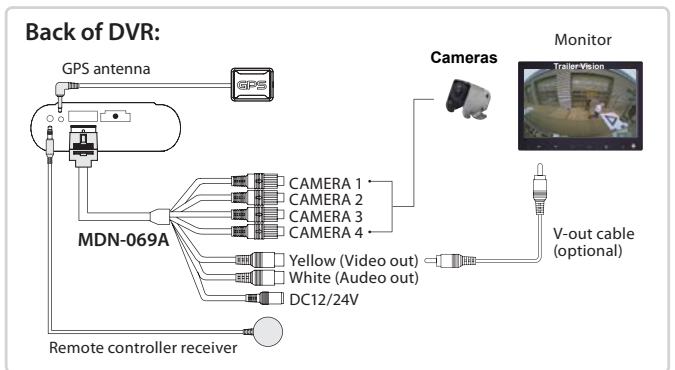

DVR	MODEL	RESOLUTION	MEMORY	3G-SENSOR	GPS	COMPRES- SION	EXT.CAMERA POWER	DIMENSION (W/H/D)	WEIGHT		
	DR-400	640x224	HDD / SSD / CF card	Internal	External	M-JPEG	4	DC 12~24V	151x130x42mm	586g	
MONITOR	MODEL	RESOLUTION	BRIGHTNESS	CONTRAST RANGE	VIEW ANGLE (L/R/T/B)	SPEAKER	REMOTE CONTROL	SIGNAL (I/O)	INPUT VOLTAGE	DIMENSION (W/H/D)	WEIGHT
	CM-709M	800x480	400cd	500:1	70/70/50/70	MONO	X	1Camera /AVinput	DC12V-24V /450mA @DC12V	174x125x27mm	480g
CAMERA	MODEL	IMAGE SENSOR	VIEW ANGLE (H/V)	WATER PROOF	USABLE ILLUMINATION	IR LED	HEAT- TING	AUDIO	INPUT VOLTAGE	DIMENSION (W/H/D)	OPERATING TEMPERATURE
	CC-5218	1/3" color CMOS sensor	180° / 140°	IP68	OVER 0.1 Lux (F=2.4)	X	X	X	DC 12V 190mA	23(Dia)x32.5mm	-30°C ~ 70°C