

Safety Information

Please store the Monitor away from direct sunlight, heat, water or moisture. This product is made with electronic components; please handle with care. Improper use may cause a malfunction.

- Do not install the Monitor where it may obstruct the drivers view, or obstruct an air bag device.
- Do not attempt to service this product.
If the system develops any faults, disconnect the power and contact Customer Services.
- Dropping the Monitor/Camera may cause permanent damage.

A failure to read and follow these warnings and instructions may result in a serious accident, including damaged property, or a serious injury, including loss of life.

Equi-Vue2™ Plus



User Manual

support@trailer vision.co.uk
01733 246473



Introduction

Thank you for purchasing Equi-Vue2™ Plus.

Please read this manual carefully before installing and utilising the system.

Improper installation, or use, will void the system Warranty.

The system is designed for remotely viewing horse(s), or any load; we recommend that it's used by a passenger, however, if utilised by the driver it should only be viewed when it's safe to do so.

If the system is utilised as a reversing, or hitching aid, the driver should also use all other available driving aids (mirrors etc) and stop the vehicle if in any doubt about the safety of the vehicle &/or other road users.

Please ensure that the monitor is not positioned in a location that obstructs the drivers view.

Contents:

Camera (Built-In Rechargeable Battery, Mag Mount & Velcro pads/mounts)

USB Charging Lead

Monitor

Aerial

Cigarette Lighter Power Adapter

Windscreen Mount


Installation

Camera

1. Fix the camera to a wall/flat surface via the built-in mag mount, or use the velcro pads (flat surface or wall mount, not on the roof).
2. Adjust the camera viewing angle via the 2 thumb screws.
3. Turn the camera on (press & hold the on button for approx 3 seconds, until the power LED flashes).

Monitor

1. Attach the aerial to the monitor.
2. Fix the monitor to the windscreen via the windscreen mount (ensuring that the driver's view of the road is not obstructed).
3. Plug the cigarette lighter power adapter into the vehicle's 12V accessory socket.
4. Turn the monitor on.

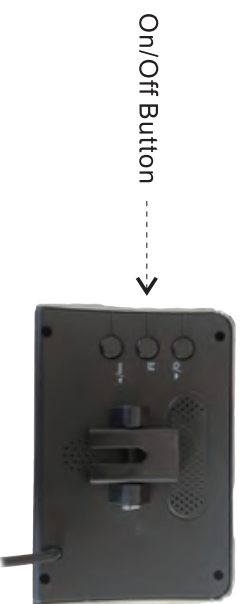

THE CAMERA IS ALREADY PAIRED TO THE MONITOR

Camera and Monitor Placement



Fix the camera to a wall/flat surface via the built-in mag mount, or use the Velcro pads (flat surface, or wall mount, not on the roof). Ideally behind the horse (in a location that the horse can't bite etc the camera).



Fix the monitor to the windscreen via the windscreen mount (ensuring that the driver's view of the road is not obstructed).

Camera LEDs

Quick Flashing - communicating with monitor - image displayed

Steady On - switched on - monitor off

Slow Flashing - standby mode - monitor off

Troubleshooting

No Monitor Image or Blue Screen

■ Camera needs charging (6+ hours use from a full charge)

■ Camera too far away from monitor (approx 30m range)

Features

- Digital Wireless (30m+ range)
- Colour 4.3" Monitor
- Camera with built-in Rechargeable Battery (6+ hours use)
- Camera with built-in Mag Mount (Velcro pads also included)
- Waterproof Camera (IP68)
- Night Vision (IR)
- Quick & Easy to Install
- No Wiring!

For support please contact:

support@trailer vision.co.uk
01733 246473



www.trailer vision.co.uk